DREAM. CLICK

REVOLUTIONARY CLICK LVT





| 3 | Driven by innovation |
|----|--------------------------------------|
| 4 | A new and revolutionary click system |
| 8 | 360° locking system |
| 11 | A solid HIPS click base |
| 13 | Advantages |
| 16 | DreamClick Pro collection |
| 26 | Safer and healthier every day |
| 27 | Installation guidelines |
| 29 | Technical data |
| 30 | Accessories |

DRIVEN BY INNOVATION

At Beaulieu Flooring Solutions you find the finest flooring under one roof.

We are the European leader in wall-to-wall flooring, with an extensive product range, excellent value for money, continuous innovation as well as dedicated and flexible professional service.

Two divisions within Beaulieu Flooring solutions, BerryAlloc and Beauflor, both commercialise the 'Vinyl Planks' product range. Within **Vinyl Planks** - also known as LVT (Luxury Vinyl Tiles)- we offer everything from peel&stick, dryback, xxl planks, click vinyl planks to our DreamClick Pro collection with it's new and revolutionary click system. Discover our wide range of over a 100 beautiful wood and tile decors.

BerryAlloc also offers you wonderful laminate for residential and commercial use, wall panels for kitchens and bathrooms and a complete parquet flooring range each with accompanying accessories.

Thanks to our excellent quality, our innovative range and exceptional service, the BerryAlloc Group has grown into an international player and highly rated interior and decoration specialist for both residential and commercial projects.

Beauflor is one of the leading producers of cushion vinyl flooring and the only manufacturer in the world to offer products 5m wide. We use state-of-the-art technology and have invested heavily in the technical aspects of the process to improve product benefits, such as easy maintenance and greater sound absorption, as well as indoor air quality by developing an antibacterial top coat which ensures long-lasting antibacterial protection for your floor.

Beaulieu Flooring Solutions is about providing you with the best of the best in a greener and more sustainable way. This particular passion influences both our philosophy and our actions.

Find more information about us and the Vinyl Planks range on our websites:

www.beaulieuflooringsolutions.com www.beauflor.com www.berryalloc.com








360° LOCKING SYSTEM

DreamClick Pro is unbeatable for installing thanks to its unique identical interlocking profile on all 4 sides. The planks click together easily on each side of the plank, back, front, left or right.


Super fast installation

The identical 4 sided locking profile allows you to install your DreamClick Pro floor faster than traditional click systems. No need to walk back to the other side of the room to start the next row. Start the installation in either corner of the room and click your way to the other side. You can start the next row where you've finished the previous row.

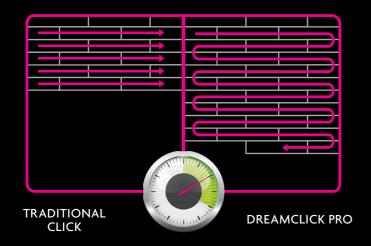


Working together on the same floor

DreamClick Pro offers you the opportunity to have several installers working simultaneously on the same floor. You can finish any room in no time at all!



Versatile and creative

Installing DreamClick Pro is not only easier, but also more fun! Expand your creative thinking and install any floor pattern you can think of, you can even mix several colours to create a staggering effect.

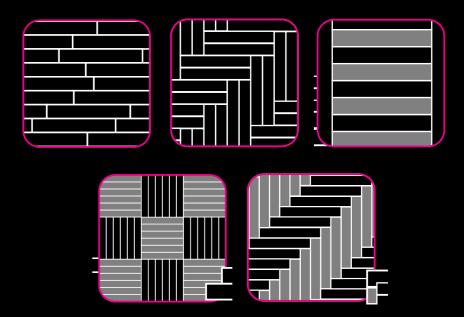

Click it your own way

You can install DreamClick Pro whichever way you want. Click the planks in by the long side and then connect the short side, or prefer doing it the other way around? Go Ahead! You can even choose whether to "push" or to "pull" the planks into place, it's so easy, anyone can do it!



First click short side



First click long side



Push




Pull



A SOLID HIPS CLICK FRAME

Dimensionally stable

DreamClick Pro is unaffected by high moisture levels and is extremely stable at normal room tempera-tures. The HIPS click frame remains stronger and more rigid across a much wider temperature range than conventional PVC systems.

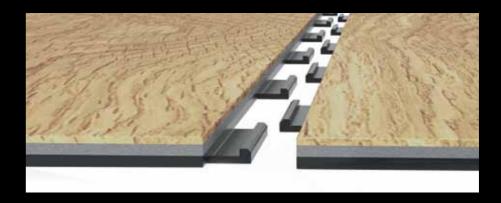

No subfloor preparation

Other smooth floors need a lot of preparation time to ensure a successful installation. With DreamClick Pro the subfloor requires little or no preparation: you can install DreamClick Pro on top of your existing hard flooring such as tiles or laminate. This means considerable time savings! The planks and the click system have a certain flexibility to make a perfect joint with no risk of the click edges breaking. A dream for renovation projects! Just let the boards acclimatize for two days and you're ready to go!

Reclickable, time and time again

Use the same DreamClick Pro floor time and time again thanks to the stronger and more rigid inter-locking tabs than click systems made of PVC alone. You can click and unclick the planks up t

30 times! A dream floor for exhibitions and temporary projects.



ADVANTAGES



Silent & soft floor

DreamClick Pro is a quiet floor, it absorbs noise and gives off a soft sound when walked on. DreamClick Pro also feels warm and makes you feel like walking on a real wooden floor.



Suitable for floor heating

DreamClick Pro has a low heat resistance, which makes it an ideal match with floor heating.



Water-resistant

DreamClick Pro is resistant to dampness or water spillages. No swelling, warping or rotting of the vinyl or HIPS frame. No lifting or curling on damp floors. (If your subfloor is not water-resistant, e.g. wooden beams, protect your subfloor with a membrane).



Lock strength

The stronger joints give a greater resistance to heavy traffic and rolling loads.



Easy maintenance

DreamClick Pro requires very little maintenance, just use a brush or vacuum cleaner or you can even clean your floor with a wet mop and standard cleaning products.




Environmentally friendly

Because it is made of virgin PVC material, our DreamClick Pro floors are 100% recyclable.



Hygienic

All our floors are hygienic, thanks to the polyurethane top layer.

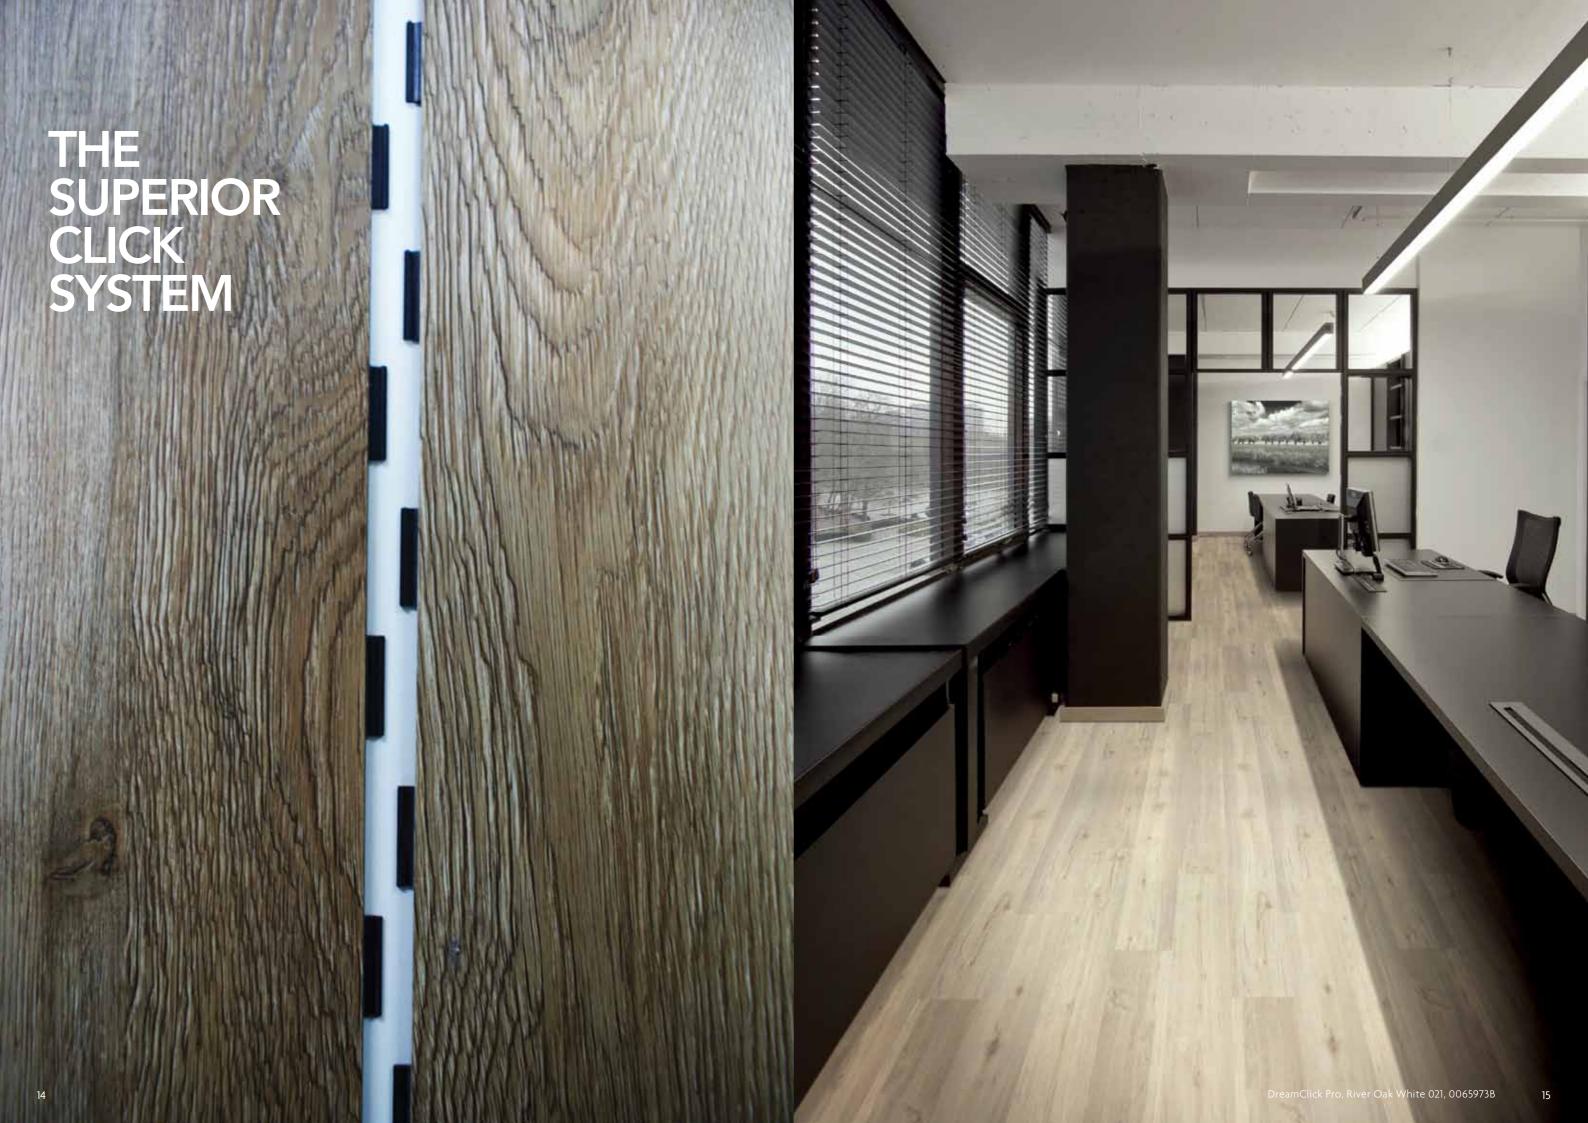






























































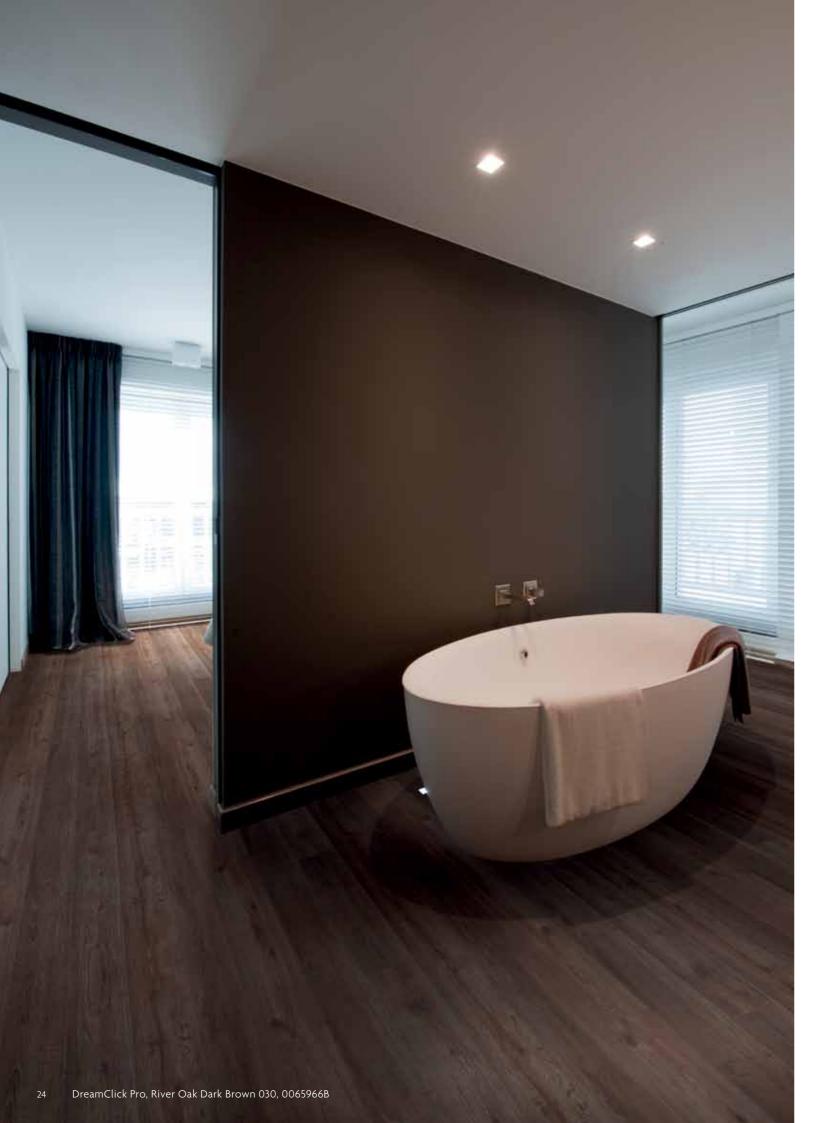

















EVERGREEN OAK PEARL 007 ART. 0065972B



RIVER OAK WHITE 021 ART. 0065973B



EVERGREEN OAK SAND 008 ART. 0065970B



RIVER OAK NATURAL 013 ART. 0065968B



PALMER OAK NATURAL 014 ART. 0065969B




RIVER OAK GREIGE 029 ART. 0065971B



KING OF FOREST SADDLE 033 ART. 0065967B



SCARLET OAK DARK BROWN 010 ART. 0065964B



RIVER OAK DARK BROWN 030 ART. 0065966B



VINTAGE OAK NATURAL 053 ART. 0065965B

SAFER AND HEALTHIER EVERY DAY

DreamClick Pro has a reduced life-cycle impact on the natural environment which makes it the perfect floor for the world of tomorrow.

- Contains no harmful substances such as heavy metals
- Low VOC-emissions
- No DOP softening additives (lower carbon chain phthalates). These are replaced by environmentally friendly components in conformity with the toughest European regulations
- No components from the S.V.H.C. list December 2012 (Substances of Very High Concern)
- Fire-rating Bfl-s1. Self-extinguishing, allows for increased evacuation time in case of fire
- 100 % recycable



INSTALLATION GUIDELINES

Before you start: let the planks acclimatize for 48 houres.

The subfloor

- The surface should be clean, dry, hard (e.g. no carpets) smooth with no sharp projections.
- DreamClick Pro will tolerate high moisture levels and mask minor cracks and small irregularities in the subfloor.
- Make sure the floor is free from chemical contamination, dust and loose debris.
- It is not necessary to remove existing hard floor coverings.
- Uneven floors will require the usual preparation with plyboard or a suitable smoothing compound.

Setting out

The planks are usually laid straight and parallel to the longer sides of the room with randomly staggered end joints - as this will result in the least amount of wastage.

Measure the room to accomodate a balanced layout. Determine if the width of the planks in the first row need to be cut. Cut off the click edges of the planks that are facing the wall.

Making the joints

- Join the planks by positioning and sliding them towards each other flat on the floor so that the connector tabs start to interlock.
- To complete the joint lift the outer edge of one plank upwards to approximately 20° and continue to gently push the planks together to achieve a perfectly tight joint, then lock the joint by lowering the plank back flat onto the floor.
- Don't use a hammer to put the planks together.

Expansion gaps

Allow an expansion gap of approx. 5 mm for thermal expansion.

Easy to cut

Use a stanley knife, jig-saw or guillotine

For more info on how to install DreamClick Pro, visit the website: www.howtoinstalldreamclick.com

2.



3.





914,4 x 152,4 x 5 mm - 36" x 6" x 0.20" 15 planks/box = 2,09 m² (16,43 kg) = 22.49 sq ft (36.81 lb) 63 boxes/pallet = 131,67 m² (1057 kg) = 1,416.87 sq ft (2,354 lb)

Product specification

| Total thickness | EN 428 | 5,30 mm / .20 inches | |
|----------------------|--------|----------------------|--|
| Wear layer | EN 429 | 0,55 mm / 22 MIL | |
| Total weight | EN 430 | 8 kg/m² (.5lbs/ft²) | |
| Surface treatment | | PUR | |
| Usage classification | EN 685 | 23 - 33 - 42 | |
| | | | |

| Test results | | | |
|-------------------------|-----------------------|----------------------------|--|
| Underfloor heating | EN 12524 | suitable - max. 27° (80°F) | |
| Castor chair | EN 425 | pass | |
| Fire resistance | EN 13501-1 | Bfl-s1 | |
| Coefficient of Friction | ASTM C1028 | 0.77 Dry 0.69 Wet | |
| Durometer Hardness | ASTM D2240 | 97 | |
| Static load limit | ASTM F970 | pass (1,500 Lbs) | |
| Electrical resistance | ASTM F150 | resistant | |
| Radiant Flux | ASTM 648 | class 1 (0.54 watts/cm²) | |
| Dimensional stability | ASTM F 2199 | pass | |
| Flexibility | ASTM F137 | pass (6 mm) | |
| Impact resistance | ASTM F1265 | pass | |
| Resistance to heat | ASTM F1514 | pass | |
| Resistance to light | ASTM F1515 | pass | |
| Size and squareness | ASTM F2055/F2421 | pass | |
| Abrasion Resistance | ASTM D4060 | 60,000 cycles | |
| Chemical resistance | EN 423 / ASTM F925 | OK / No Effect 24 hrs | |
| Residual indentation | EN 433 / ASTM F1914 | < 0,10 mm / 0.009 (4%) | |
| Slip resistance | DIN 51130 EN 13983 | R10 class DS | |
| Sound reduction | EN ISO 717-2 (∆ Lw) | 8 dB | |
| Light fastness | ISO 105-B02 | > 6 | |
| Drum noise | EPLF | SL60 | |
| Locking strength | | 500 kg/m - 340 lbs/lin ft | |
| Anti static | EN 1815 | yes | |
| Residential warranty | | Lifetime | |
| Commercial warranty | | 10 years | |
| Formaldehyde | | El | |











ACCESSORIES



| UNDERLAYS (DREAMCLICK) Order quantity | | | |
|---------------------------------------|--------------|-----------|--|
| DREAMTEC (18 DB - 0,9 MM) | 10 m² / roll | 9300-0008 | |

| CLIPS - MDF SKIRTING | Order quantity | |
|--------------------------|--------------------------------|-----------|
| SKIRTING CLIPS AND PLUGS | Sold per bag (30 clips/bag) | 9310-0017 |

| ALUMINIUM PROFILES | Order quantity | Silver | Champ. | Bronze |
|--|----------------|-----------|-----------|-----------|
| REDUCER 2 m 4-7,5 x 33 x 2000 mm | Per piece | 9422-3017 | 9422-3016 | 9422-3018 |
| T-PROFILE 2 m 4-7,5 x 24 x 2000 mm | Per piece | 9412-3017 | 9412-3016 | 9412-3018 |
| END PROFILE 2 m 4-7.5 x 20 x 2000 mm | Per piece | 9431-3017 | 9431-3016 | 9431-3018 |

ACCESSORIES

The perfect finish for a dream floor

Because the correct, meticulously chosen finish makes all the difference in the world, we are not satisfied with a half-finished job. That is why Beauflor has a comprehensive range of skirtings that is ready for you to use.

60 mm MDF skirting



H 60 x W 14 x L 2400 mm Sold per 4 pieces

Clips for MDF skirtings



30 clips per bag Sold per bag

70 mm skirting water resistant



H 70 x W 12 x L 2400 mm Sold per 4 pieces

T-Profile Silver Aluminium *



H 4-7,5 x W 24 x L 2000 mm Sold per piece

Reducer Profile Silver Aluminium *



H 4-7,5 x W 33 x L 2000 mm Sold per piece

End Profile Silver Aluminium *



H 4-7,5 x W 20 x L 2000 mm Sold per piece

DreamTec+



The DreamTec + underlay, designed for click vinyl planks

- Improves the transition sound (to the room below) 20dB
- Improves the walking sound ***
- Highly suited for floor heating
- Very high compressive strength
- Corrects irregularities in the floor (installation over porous subfloors)
- With integrated moisture barrier
- Easy installation: folds out flat straight away
- Available in boxes of 10 m²

* Also available in champagne and bronze colours.

Dealer

DreamClick



VISIT WEBSITE FOR INSTALLATION INSTRUCTIONS: www.howtoinstalldreamclick.com



